


# Valena™ Life

## Connected 2-gang ON/OFF wireless control for lighting and sockets

Cat. Nos: 7 521 87 - 7 522 87 - 7 523 87

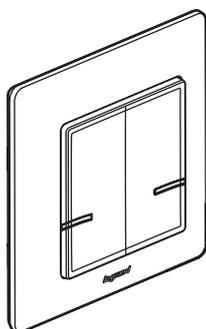

### 1. USE

Wireless control for 2 ON/OFF light functions or connected socket. Controls micromodule products, connected sockets and connected dimmer switches.

Can be used as a two-way switch or to control a lighting group.

• Fixes directly on the wall or screws onto a flush-mounting box.

Multi-gang versions can be combined with other wiring accessories.


• Fits on a piece of furniture (movable).

Can control up to 20 micromodules, connected sockets, connected dimmer switches

### 2. RANGE



Description	White	Ivory	Aluminium
2-gang wireless lighting and socket control for an ON/OFF, dimmer, centralisation function. Supplied complete with battery. With LED indicator (configuration) and RESET button (hidden) used to return to factory settings. Repositionable self-adhesive fixings supplied.	7 521 87	7 522 87	7 523 87

### 3. DIMENSIONS

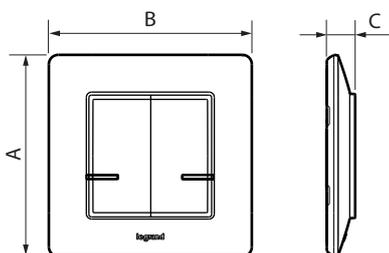

References	A	B	C
7 521 87 - 7 522 87 - 7 523 87	86	86	12

### 4. OPERATION

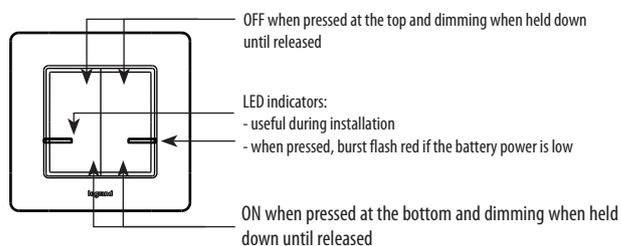

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against impacts: IK 02

Protection against solid bodies/liquids: IP 20 without plate or rocker plate  
IP 40 for assembled product

#### ■ 5.2 Material characteristics

Colour	White RAL 9003	Ivory RAL 1013	Aluminium
Plate	ABS	ABS	ABS
Rocker plate	ABS	ABS	ABS

Sous-plaque : PC

Boîtier mécanisme avec support : PC chargé 10% fibre de verre

Sans halogène

Tenue aux UV

Autoextinguibilité : 650° C / 30 s

#### ■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)

Battery life: 8 years for 10 activations a day

**ZigBee radio technology** frequency: 2.4 GHz to 2.4835 GHz

Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard IEEE 802.15.4 (LR-WPAN)

Power level: < 100 mW

#### ■ 5.4 Climate characteristics

Usage temperature: + 5° C to + 45° C

Storage temperature: 0° C to + 45° C

## 6. CARE

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

**Caution:** Always test before using special cleaning products.

The plates must not be painted.



Take care to recycle the battery appropriately

## 7. ACCESSORIES

0 648 71: Repositionable adhesive for wireless control (x 4 supplied)

## 8. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (7 521 87 - 7 522 87 - 7 523 87) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: [www.legrandoc.com](http://www.legrandoc.com)